



UNITED STATES PATENT AND TRADEMARK OFFICE

COMMISSIONER FOR PATENTS
UNITED STATES PATENT AND TRADEMARK OFFICE
WASHINGTON, D.C. 20231
www.uspto.gov



Bib Data Sheet

SERIAL NUMBER 60/231,427	FILING DATE 09/08/2000 RULE -	CLASS -	GROUP ART UNIT -	ATTORNEY DOCKET NO. 29089.1450
APPLICANTS Michael N. Kozicki, Phoenix, AZ ;				
** CONTINUING DATA *****				
** FOREIGN APPLICATIONS *****				
IF REQUIRED, FOREIGN FILING LICENSE GRANTED ** 12/12/2000				
** SMALL ENTITY **				
Foreign Priority claimed <input type="checkbox"/> yes <input type="checkbox"/> no		STATE OR COUNTRY AZ	SHEETS DRAWING 5	TOTAL CLAIMS -
35 USC 119 (a-d) conditions <input type="checkbox"/> yes <input type="checkbox"/> no <input type="checkbox"/> Met after Allowance				
Verified and Acknowledged		Examiner's Signature Initials		
ADDRESS 20322				
TITLE Electrodes for the programmable metallization cell				
FILING FEE RECEIVED 75	FEES: Authority has been given in Paper No. _____ to charge/credit DEPOSIT ACCOUNT No. _____ for following:		<input type="checkbox"/> All Fees <input type="checkbox"/> 1.16 Fees (Filing) <input type="checkbox"/> 1.17 Fees (Processing Ext. of time) <input type="checkbox"/> 1.18 Fees (Issue) <input type="checkbox"/> Other _____ <input type="checkbox"/> Credit	

**PROGRAMMABLE MICROELECTRONIC DEVICES
AND METHODS OF FORMING AND PROGRAMMING SAME**

5 **Inventors:** Michael Kozicki

CROSS REFERENCE TO RELATED APPLICATIONS

This application claims the benefit of United States Provisional Application Serial
Number 60/119,757, filed February 11, 1999 and International Application Serial Number
10 PCT/US98/25830, filed December 4, 1998.

FIELD OF THE INVENTION

15 The present invention generally relates to microelectronic devices. More particularly,
the invention relates to programmable microelectronic structures suitable for use in integrated
circuits.

BACKGROUND OF THE INVENTION

20 Memory devices are often used in electronic systems and computers to store
information in the form of binary data. These memory devices may be characterized into
various types, each type having associated with it various advantages and disadvantages.

For example, random access memory ("RAM") which may be found in personal
computers is volatile semiconductor memory; in other words, the stored data is lost if the
25 power source is disconnected or removed. Dynamic RAM ("DRAM") is particularly volatile
in that it must be "refreshed" (i.e., recharged) every few microseconds in order to maintain
the stored data. Static RAM ("SRAM") will hold the data after one writing so long as the
power source is maintained; once the power source is disconnected, however, the data is lost.
Thus, in these volatile memory configurations, information is only retained so long as the
30 power to the system is not turned off. In general, these RAM devices may be expensive to
manufacture and consume relatively large amounts of energy during operation of the devices.
Accordingly, improved memory devices suitable for use in personal computers and the like
are desirable.

CD-ROM and DVD-ROM are examples of non-volatile memory. DVD-ROM is
35 large enough to contain lengthy audio and video information segments; however, information

can only be read from and not written to this memory. Thus, once a DVD-ROM is programmed during manufacture, it cannot be reprogrammed with new information.

Other storage devices such as magnetic storage devices (e.g., floppy disks, hard disks and magnetic tape) as well as other systems, such as optical disks, are non-volatile, have extremely high capacity, and can be rewritten many times. Unfortunately, these memory devices are physically large, are shock/vibration-sensitive, require expensive mechanical drives, and may consume relatively large amounts of power. These negative aspects make these memory devices non-ideal for low power portable applications such as lap-top and palm-top computers, personal digital assistants ("PDAs"), and the like.

Due, at least in part, to a rapidly growing numbers of compact, low-power portable computer systems in which stored information changes regularly, read/write semiconductor memories have become increasingly desirable and widespread. Furthermore, because these portable systems often require data storage when the power is turned off, non-volatile storage device are desired for use in such systems.

One type of programmable semiconductor non-volatile memory device suitable for use in such systems is a programmable read-only memory ("PROM") device. One type of PROM, a write-once read-many ("WORM") device, uses an array of fusible links. Once programmed, the WORM device cannot be reprogrammed.

Other forms of PROM devices include erasable PROM ("EPROM") and electrically erasable PROM (EEPROM) devices, which are alterable after an initial programming. EPROM devices generally require an erase step involving exposure to ultra violet light prior to programming the device. Thus, such devices are generally not well suited for use in portable electronic devices. EEPROM devices are generally easier to program, but suffer from other deficiencies. In particular, EEPROM devices are relatively complex, are relatively difficult to manufacture, and are relatively large. Furthermore, a circuit including EEPROM devices must withstand the high voltages necessary to program the device. Consequently, EEPROM cost per bit of memory capacity is extremely high compared with other means of data storage. Another disadvantage of EEPROM devices is that although they can retain data without having the power source connected, they require relatively large amounts of power to program. This power drain can be considerable in a compact portable system powered by a battery.

In view of the various problems associated with conventional data storage devices described above, a relatively non-volatile, programmable device which is relatively simple and inexpensive to produce is desired. Furthermore, this memory technology should meet the

000000-2247E209

requirements of the new generation of portable computer devices by operating at a relatively low voltage while providing high storage density, and a low manufacturing cost.

SUMMARY OF THE INVENTION

5 The present invention provides improved microelectronic devices for use in integrated circuits. More particularly, the invention provides relatively non-volatile, programmable devices suitable for memory and other integrated circuits.

10 The ways in which the present invention addresses various drawbacks of now-known programmable devices are discussed in greater detail below. However, in general, the present invention provides a programmable device that is relatively easy and inexpensive to manufacture, and which is relatively easy to program.

15 In accordance with one exemplary embodiment of the present invention, a programmable structure includes an ion conductor and at least two electrodes. The structure is configured such that when a bias is applied across two electrodes, one or more electrical properties of the structure change. In accordance with one aspect of this embodiment, a resistance across the structure changes when a bias is applied across the electrodes. In accordance with other aspects of this embodiment, a capacitance, or other electrical properties of the structure change upon application of a bias across the electrodes. One or more of these electrical changes may suitably be detected. Thus, stored information may be retrieved from a circuit including the structure.

20 In accordance with another exemplary embodiment of the invention, a programmable structure includes an ion conductor, at least two electrodes, and a barrier interposed between at least a portion of one of the electrodes and the ion conductor. In accordance with one aspect of this embodiment the barrier material includes a material configured to reduce diffusion of ions between the ion conductor and at least one electrode. The diffusion barrier may also serve to prevent undesired electrodeposition growth within a portion of the structure. In accordance with another aspect, the barrier material includes an insulating material. Inclusion of an insulating material increases the voltage required to reduce the resistance of the device to its lowest possible value. Devices including an insulating barrier may be well suited for non-volatile memory (e.g., EEPROM) applications.

25 In accordance with another exemplary embodiment of the invention, a programmable microelectronic structure is formed on a surface of a substrate by forming a first electrode on the substrate, depositing a layer of ion conductor material over the first electrode, and

60231427-090800

60231427-090800

depositing conductive material onto the ion conductor material. In accordance with one aspect of this embodiment, a solid solution including the ion conductor and excess conductive material is formed by dissolving (e.g., via thermal or photodissolution) a portion of the conductive material in the ion conductor. In accordance with a further aspect, only a portion of the conductive material is dissolved, such that a portion of the conductive material remains on a surface of the ion conductor to form an electrode on a surface of the ion conductor material.

In accordance with another embodiment of the present invention, at least a portion of a programmable structure is formed within a through-hole or via in an insulating material. In accordance with one aspect of this embodiment, a first electrode feature is formed on a surface of a substrate, insulating material is deposited onto a surface of the electrode feature, a via is formed within the insulating material, and a portion of the programmable structure is formed within the via. In accordance with one aspect of this embodiment, after the via is formed within the insulating material, a portion of the structure within the via is formed by depositing an ion conductive material onto the conductive material, depositing a second electrode material onto the ion conductive material, and, if desired, removing any excess electrode, ion conductor, and/or insulating material.

In accordance with a further exemplary embodiment of the invention, multiple bits of information are stored in a single programmable structure.

In accordance with yet another exemplary embodiment of the present invention, a capacitance of a programmable structure is altered by causing ions within an ion conductor of the structure to migrate.

BRIEF DESCRIPTION OF THE DRAWINGS

A more complete understanding of the present invention may be derived by referring to the detailed description and claims, considered in connection with the figures, wherein like reference numbers refer to similar elements throughout the figures, and:

Figure 1 is a cross-sectional illustration of a programmable structure formed on a surface of a substrate in accordance with the present invention;

Figure 2 is a cross-sectional illustration of a programmable structure in accordance with an alternative embodiment of the present invention;

Figure 3 is a cross-sectional illustration of a programmable structure in accordance with an alternative embodiment of the present invention;

Figure 4 is a current-voltage diagram illustrating current and voltage characteristics of the device illustrated in Figure 3 in an "on" and "off" state;

Figure 5 is a cross-sectional illustration of a programmable structure in accordance with yet another embodiment of the present invention;

Figure 6 is a schematic illustration of a portion of a memory device in accordance with an exemplary embodiment of the present invention; and

Figure 7 is a schematic illustration of a portion of a memory device in accordance with an alternative embodiment of the present invention.

DETAILED DESCRIPTION OF EXEMPLARY EMBODIMENTS

The present invention generally relates to microelectronic devices. More particularly, the invention relates to programmable structures suitable for various integrated circuit applications.

Figure 1 illustrates a programmable microelectronic structure 100 formed on a surface of a substrate 110 in accordance with an exemplary embodiment of the present invention. Structure 100 suitably includes electrodes 120 and 130 and an ion conductor 140.

Generally, structure 100 is configured such that when a bias greater than a threshold voltage (V_T), discussed in more detail below, is applied across electrodes 120 and 130, the electrical properties of structure 100 change. For example, in accordance with one embodiment of the invention, as a voltage $V \geq V_T$ is applied across electrodes 120 and 130, conductive ions within ion conductor 140 begin to migrate and form an electrodeposit (e.g., electrodeposit 160) at or near the more negative of electrodes 120 and 130. As the electrodeposit forms, the resistance between electrodes 120 and 130 decreases, and other electrical properties may also change. In the absence of any insulating barriers, which are discussed in more detail below, the threshold voltage required to grow the electrodeposit from one electrode toward the other and thereby significantly reduce the resistance of the device is essentially the redox potential of the system, typically a few hundred millivolts. If the same voltage is applied in reverse, the electrodeposit will dissolve back into the ion conductor and the device will return to its high resistance state. As discussed in more detail below, structure 100 may be used to store information and thus may be used in memory circuits. For example, structure 100 or other programmable structures in accordance with the present invention may suitably be used in memory devices to replace DRAM, SRAM, PROM, EPROM, or EEPROM devices.

50231427.000800

Ion conductor 140 is formed of material that conducts ions upon application of a sufficient voltage. Suitable materials for ion conductor 140 include glasses and semiconductor materials. In one exemplary embodiment of the invention, ion conductor 140 is formed of chalcogenide material.

5 Ion conductor 140 may also suitably include dissolved conductive material. For example, ion conductor 140 may comprise a solid solution that includes dissolved metals and/or metal ions. In accordance with one exemplary embodiment of the invention, conductor 140 includes metal and/or metal ions dissolved in chalcogenide glass. An exemplary chalcogenide glass with dissolved metal in accordance with the present invention
10 includes a solid solution of $As_xS_{1-x}-Ag$, $Ge_xSe_{1-x}-Ag$, $Ge_xS_{1-x}-Ag$, $As_xS_{1-x}-Cu$, $Ge_xSe_{1-x}-Cu$, $Ge_xS_{1-x}-Cu$, other chalcogenide materials including silver, copper, zinc, combinations of these materials, and the like. In addition, conductor 140 may include network modifiers that affect mobility of ions through conductor 140. For example, materials such as metals (e.g., silver), halogens, halides, or hydrogen may be added to conductor 140 to enhance ion
15 mobility and thus increase erase/write speeds of the structure.

A solid solution suitable for use as ion conductor 140 may be formed in a variety of ways. For example, the solid solution may be formed by depositing a layer of conductive material such as metal over an ion conductive material such as chalcogenide glass and exposing the metal and glass to thermal and/or photo dissolution processing. In accordance
20 with one exemplary embodiment of the invention, a solid solution of As_2S_3-Ag is formed by depositing As_2S_3 onto a substrate, depositing a thin film of Ag onto the As_2S_3 , and exposing the films to light having energy greater than the optical gap of the As_2S_3 , e.g., light having a wavelength of less than about 500 nanometers. If desired, network modifiers may be added to conductor 140 during deposition of conductor 140 (e.g., the modifier is in the deposited
25 material or present during conductor 140 material deposition) or after conductor 140 material is deposited (e.g., by exposing conductor 140 to an atmosphere including the network modifier).

In accordance with one aspect of this embodiment, a solid solution ion conductor 140 is formed by depositing sufficient metal onto an ion conductor material such that a portion of
30 the metal can be dissolved within the ion conductor material and a portion of the metal remains on a surface of the ion conductor to form an electrode (e.g., electrode 120). In accordance with alternative embodiments of the invention, solid solutions containing dissolved metals may be directly deposited onto substrate 110

An amount of conductive material such as metal dissolved in an ion conducting material such as chalcogenide may depend on several factors such as an amount of metal available for dissolution and an amount of energy applied during the dissolution process. However, when a sufficient amount of metal and energy are available for dissolution in
5 chalcogenide material using photodissolution, the dissolution process is thought to be self limiting, substantially halting when the metal cations have been reduced to their lowest oxidation state. In the case of $\text{As}_2\text{S}_3\text{-Ag}$, this occurs at $\text{Ag}_4\text{As}_2\text{S}_3 = 2\text{Ag}_2\text{S} + \text{As}_2\text{S}_3$, having a silver concentration of about 44 atomic percent. If, on the other hand, the metal is dissolved in the chalcogenide material using thermal dissolution, a higher atomic percentage of metal in
10 the solid solution may be obtained, provided a sufficient amount of metal is available for dissolution.

In accordance with one exemplary embodiment of the invention, at least a portion of structure 100 is formed within a via of an insulating material 150. Forming a portion of structure 100 within a via of an insulating material 150 may be desirable because, among
15 other reasons, such formation allows relatively small structures 100, *e.g.*, on the order of 10 nanometers, to be formed. In addition, insulating material 150 facilitates isolating various structures 100 from other electrical components.

Insulating material 150 suitably includes material that prevents undesired diffusion of electrons and/or ions from structure 100. In accordance with one embodiment of the
20 invention, material 150 includes silicon nitride, silicon oxynitride, polymeric materials such as polyimide or parylene, or any combination thereof.

A contact 160 may suitably be electrically coupled to one or more electrodes 120, 130 to facilitate forming electrical contact to the respective electrode. Contact 160 may be formed of any conductive material and is preferably formed of a metal such as aluminum,
25 aluminum alloys, tungsten, or copper.

A programmable structure in accordance with the present invention, *e.g.*, structure 100, may be formed in a variety of ways. In accordance with one embodiment of the invention, structure 100 is formed by forming electrode 130 on substrate 110. Electrode 130 may be formed using any suitable method such as, for example, depositing a layer of
30 electrode 130 material, patterning the electrode material, and etching the material to form electrode 130. Insulating layer 150 may be formed by depositing insulating material onto electrode 130 and substrate 110, and forming vias in the insulating material using appropriate patterning and etching processes. Ion conductor 140 and electrode 120 may then be formed within insulating layer 150 by depositing ion conductor 140 material and electrode 120

60231427.000000

material within the via. Such ion conductor and electrode material deposition may be selective — *i.e.*, the material is substantially deposited only within the via, or the deposition processes may be relatively non-selective. If one or more non-selective deposition methods are used, any excess material remaining on a surface of insulating layer 150 may be removed, using, for example, chemical mechanical polishing and/or etching techniques.

Figure 3 illustrates a programmable structure 300 in accordance with another embodiment of the present invention. Similar to structure 100, structure 300 is formed on a substrate 310 and includes electrodes 320 and 330, and an ion conductor 340. In addition, structure 300 includes an insulating barrier 350 interposed between at least one electrode 320, 330 and ion conductor 340. Insulating barrier 350 may be formed of any material resistant to conduction of electricity. In accordance with various exemplary embodiments of the invention, barrier 350 is formed of a metal oxide such as a native tungsten oxide or native nickel oxide. Alternatively other insulating materials may be deposited onto the electrode. Among other things, barrier 350 may affect an effective threshold voltage of device 300 and prevent an electrical short between electrode 320 and 330 via an electrodeposit (*e.g.*, electrodeposit 360) unless a voltage is applied which is sufficiently high to cause the insulating barrier to break down. For example, for a given insulating material, the effective threshold voltage of device 300 generally increases as a thickness of barrier 350 increase, thus device 300 threshold voltage may be controlled, at least in part, by controlling barrier 350 thickness. In this case, barrier 350 should be thin enough (*i.e.*, 0 to about 3 nanometers) to allow electrons to tunnel through barrier 350 at a desired operating voltage (*e.g.*, about 0.2V to about 4V).

In operation, when a sufficient voltage is applied between two or more electrodes of a programmable structure (*e.g.*, electrodes 320 and 330 of structure 300), electrodeposit 360 begins to form, through or along an edge of ion conductor 340, from the more negative electrode (cathode) (*e.g.*, electrode 330) toward the more positive electrode (anode) (*e.g.*, electrode 320). For example, if electrode 330 is coupled to a negative terminal of a voltage supply and electrode 320 is coupled to a positive terminal of a voltage supply and a sufficient bias is applied between electrodes 320 and 330, electrodeposit 360—*e.g.*, a metallic dendrite—will begin to grow from electrode 330 toward electrode 320.

When electrode 330 is initially coupled to a more negative potential, an electrodeposit begins to grow on surface 355 of barrier 350 upon application of a voltage \geq the redox potential. As a voltage sufficient to breakdown barrier 350 is applied across electrodes 320

60231427-000000

and 330 a short forms between electrodes 320 and 330. When a sufficient reverse bias is applied to electrodes 320 and 330, electrodeposit 360 dissolves in conductor 340 and barrier 350 appears to heal itself such that approximately the same effective threshold voltage is required to breakdown barrier 350. Thus, when structure 300 includes an insulating barrier 350, an effective threshold or "write" voltage is governed by breakdown characteristics (e.g., thickness) of barrier 350.

Growth and configuration of an electrodeposit (e.g., electrodeposit 360) and reversal of electrodeposit growth generally affect electrical properties of a programmable device such as structures 100-300. In turn, growth and a configuration of the electrodeposit depend on, among other things, an applied voltage bias, an amount of time the bias is applied to electrodes (e.g., electrodes) 320 and 330, and structure geometry. In particular, at relatively low voltages, electrodeposit growth is relatively slow and tends to concentrate about the cathode of a structure, whereas at higher voltages, the electrodeposit grows at a faster rate and tends to be more narrow and span a greater distance between the cathode and the anode, for a given amount of charge.

Once electrodeposit 360 begins to form, electrodeposit 360 will generally maintain its form after the voltage source is removed from structure 100. Thus, changes of electrical properties associated with growth of electrodeposit 360 (e.g., structure 300 capacitance, resistance, threshold voltage, and the like) do not vary substantially over time. In other words, the changes in electrical properties of structure 100 are relatively non-volatile. Accordingly, structure 100 may be well suited for memory devices of electronic systems that typically employ PROM, EPROM, EEPROM, FLASH devices, and the like.

In accordance with an alternate embodiment of the invention, the programmable structure may be periodically refreshed to enhance data storage integrity. In this case, the structure may be employed in a RAM (e.g., DRAM) memory device.

WRITE OPERATION

Information may be stored using programmable structures of the present invention by manipulating one or more electrical properties of the structures. For example, a resistance of a structure may be changed from a "0" or off state to a "1" or on state during a suitable write operation. Similarly, the device may be changed from a "1" state to a "0" state during an erase operation. In addition, as discussed in more detail below, the structure may have multiple programmable states such that multiple bits of information are stored in a single structure.

60231427-090800

Figure 4 illustrates current-voltage characteristics of programmable structure 300 in accordance with the present invention. For the structure illustrated in Figure 4, via diameter, D, is about 4 microns, conductor 340 is about 35 nanometers thick and formed of $\text{Ge}_3\text{Se}_7\text{-Ag}$ (near $\text{As}_8\text{Ge}_3\text{Se}_7$), electrode 330 is indifferent and formed of nickel, electrode 320 is formed of silver, and barrier 350 is a native nickel oxide. As illustrated in Figure 4, current through structure 300 in an off state (curve 410) begins to rise upon application of a bias of over about one volt; however, once a write step has been performed (*i.e.*, an electrodeposit has formed), the resistance through conductor 340 drops significantly (*i.e.*, to about 200 ohms), illustrated by curve 420 in Figure 4. As noted above, when electrode 330 is coupled to a more negative end of a voltage supply, compared to electrode 320, electrodeposit 360 begins to form near electrode 330 and grow toward electrode 320. An effective threshold voltage (*i.e.*, voltage required to cause growth of electrodeposit 360 and to break through barrier 350, thereby coupling electrodes 320, 330 together) is relatively high because of barrier 350. In particular, a voltage $V \geq V_T$ must be applied to structure 300 sufficient to cause electrons to tunnel through barrier 350 to form the electrodeposit and to break down the barrier and conduct through conductor 340 and at least a portion of barrier 350.

In accordance with alternate embodiments of the invention illustrated in Figures 1 and 2, an initial "write" threshold voltage is relatively low because no insulative barrier is formed between, for example, ion conductor 140 and either of the electrodes 120, 130.

READ OPERATION

A state of the device (*e.g.*, 1 or 0) may be read, without significantly disturbing the state, by, for example, applying a forward or reverse bias of magnitude less than a voltage threshold (about 1.4 V for a structure illustrated in Figure 4) for electrodeposition or by using a current limit which is less than or equal to the minimum programming current (the current which will produce the highest of the on resistance values). A current limited (to about 1 milliamp) read operation is shown in Figure 4. In this case, the voltage is swept from 0 to about 2 V and the current rises up to the set limit (from 0 to 0.2 V), indicating a low resistance (ohmic/linear current-voltage) "on" state. Another way of performing a non-disturb read operation is to apply a pulse, with a relatively short duration, which may have a voltage higher than the electrochemical deposition threshold voltage such that no appreciable Faradaic current flows, *i.e.*, nearly all the current goes to polarizing/charging the device and not into the electrodeposition process.

ERASE OPERATION

5 A programmable structure (e.g., structure 300) may suitably be erased by reversing a bias applied during a write operation, wherein a magnitude of the applied bias is equal to or greater than the threshold voltage for electrodeposition in the reverse direction. In accordance with an exemplary embodiment of the invention, a sufficient erase voltage ($V \geq V_T$) is applied to structure 300 for a period of time which depends on the strength of the initial connection but is typically less than about 1 millisecond to return structure 300 to its "off" state having a resistance well in excess of a million ohms. Because structure 300 does not include a barrier between conductor 340 and electrode 320, a threshold voltage for erasing structure 300 is much lower than a threshold voltage for writing structure 300 because, unlike the write operation, the erase operation does not require electron tunneling through barrier 350 or barrier 350 breakdown.

10 A portion of an integrated circuit 502, including a programmable structure 500, configured to provide additional isolation from electronic components is illustrated in Figure 5. In accordance with an exemplary embodiment of the present invention, structure 500 includes electrodes 520 and 530, an ion conductor 540, a contact 560, and an amorphous silicon diode 570, such as a Schottky or p-n junction diode, formed between contact 560 and electrode 520. Rows and columns of programmable structures 500 may be fabricated into a high density configuration to provide extremely large storage densities suitable for memory circuits. In general, the maximum storage density of memory devices is limited by the size and complexity of the column and row decoder circuitry. However, a programmable structure storage stack can be suitably fabricated overlying an integrated circuit with the entire semiconductor chip area dedicated to row/column decode, sense amplifiers, and data management circuitry (not shown) since structure 500 need not use any substrate real estate. In this manner, storage densities of many gigabits per square centimeter can be attained using programmable structures of the present invention. Utilized in this manner, the programmable structure is essentially an additive technology that adds capability and functionality to existing semiconductor integrated circuit technology.

25 30 Figure 6 schematically illustrates a portion of a memory device including structure 500 having an isolating p-n junction 570 at an intersection of a bit line 610 and a word line 620 of a memory circuit. Figure 7 illustrates an alternative isolation scheme employing a

60231427-000000

transistor 710 interposed between an electrode and a contact of a programmable structure located at an intersection of a bit line 710 and a word line 720 of a memory device.

As noted above, in accordance with yet another embodiment of the invention, multiple bits of data may be stored within a single programmable structure by controlling an amount of electrodeposit which is formed during a write process. An amount of electrodeposit that forms during a write process depends on a number of coulombs or charge supplied to the structure during the write process, and may be controlled by using a current limit power source. In this case, a resistance of a programmable structure is governed by Equation 1, where R_{on} is the "on" state resistance, V_T is the threshold voltage for electrodeposition, and I_{LIM} is the maximum current allowed to flow during the write operation.

$$R_{on} = \frac{V_T}{I_{LIM}}$$

Equation 1

In practice, the limitation to the amount of information stored in each cell will depend on how stable each of the resistance states is with time. For example, if a structure is with a programmed resistance range of about 3.5 k Ω and a resistance drift over a specified time for each state is about $\pm 250 \Omega$, about 7 equally sized bands of resistance (7 states) could be formed, allowing 3 bits of data to be stored within a single structure. In the limit, for near zero drift in resistance in a specified time limit, information could be stored as a continuum of states, i.e., in analog form.

In accordance with yet another embodiment of the present invention, a programmable structure (e.g., structure 300) stores information by storing a charge as opposed to growing an electrodeposit. In accordance with one aspect of this embodiment, a capacitance of structure 300 is altered by applying a bias to electrodes 320, 330 (e.g. positive voltage to electrode 320 with respect to electrode 330) such that positively charged ions migrate toward electrode 330. If the applied bias is less than a write threshold voltage (or voltage required to break through barrier 350), no short will form between electrodes 320 and 330. Capacitance of the structure 300 changes as a result of the ion migration. When the applied bias is removed, the metal ions tend to diffuse away from barrier 350. However, an interface between conductor 340 and barrier 350 is generally imperfect and includes defects capable of trapping ions. Thus, at least a portion of ions remain at or proximate an interface between barrier 350 and conductor 340. If a write voltage is reversed, the ions may suitably be dispersed away from the

interface. A more complete description of a programmable structure in accordance with this embodiment is provided in Application Serial No. 60/119,757, filed February 11, 1999, the entire contents of which are incorporated herein by reference.

5 A programmable structure in accordance with the present invention may be used in many applications which would otherwise utilize traditional technologies such as EEPROM, FLASH or DRAM. Advantages provided by the present invention over present memory techniques include, among other things, lower production cost and the ability to use flexible fabrication techniques which are easily adaptable to a variety of applications. The programmable structures of the present invention are especially advantageous in applications
10 where cost is the primary concern, such as smart cards and electronic inventory tags. Also, an ability to form the memory directly on a plastic card is a major advantage in these applications as this is generally not possible with other forms of semiconductor memories.

15 Further, in accordance with the programmable structures of the present invention, memory elements may be scaled to less than a few square microns in size, the active portion of the device being less than one micron. This provides a significant advantage over traditional semiconductor technologies in which each device and its associated interconnect can take up several tens of square microns.

20 Although the present invention is set forth herein in the context of the appended drawing figures, it should be appreciated that the invention is not limited to the specific form shown. For example, while the programmable structure is conveniently described above in connection with programmable memory devices, the invention is not so limited. For example, the structure of the present invention may suitably be employed as a programmable active or passive devices within a microelectronic circuit. Various other modifications, variations, and enhancements in the design and arrangement of the method and apparatus set
25 forth herein, may be made without departing from the spirit and scope of the present invention as set forth in the appended claims.

008060.247E209

60231427.090800

Common Electrode Configurations of the Programmable Metallization Cell

Metals such as silver or copper can be thermally or photo-dissolved in chalcogenide glasses such as arsenic sulfide or germanium selenide, to form solid solutions. If electrodes are formed in contact with a layer of the solid solution and a small voltage is applied between them, the positively charged metal ions will migrate toward the cathode region. If the anode contains the same metal in solution (in oxidizable form) and the applied voltage is above the redox potential, the ions will come out of solution at the cathode to form a stable metallic electrodeposit. This metallic feature may be made to extend from the cathode to the anode. The electrodeposit can form on the surface of the chalcogenide or through a thin layer of the glass, depending on the placement of the electrodes. In either case, the low resistance metal electrodeposit acts to short-out the relatively high resistance glass and hence the overall resistance of the structure can be reduced by many orders of magnitude via this electrically-stimulated deposition process. A reverse bias voltage above the magnitude of the redox potential will result in electrodisolution of the metal link and hence the device can be made to return to a high resistance state. This is the basis of the Programmable Metallization Cell (PMC) technology.

It is desirable to fabricate dense arrays of PMC devices to form high capacity memories. One way to improve packing density is to allow pairs devices to share one electrode (a common anode or cathode), thereby reducing the overall area consumed by each memory cell. The following techniques may be used to create a reduced area device by utilizing a common electrode. The key to the figures is as follows:



1. *Horizontal configuration.* The electrodes in horizontal PMC devices are coplanar on a narrow (minimum definable lateral geometry) thin film of the solid solution (Fig. 1). The film thickness is in the order of a few tens of nm down to a few nm. To allow a "row

60231427-090800

and column" layout in which one set of electrodes, e.g. all the anode connections, run east-west and the other set (the cathodes in this example) run north-south, a via provides connection to the coplanar common electrode (the true anode in this case). Of course, the cathode connections may run east-west and the anode wiring north-south if desired to make the shared coplanar electrode the cathode in an alternative embodiment. In addition, the shared electrode plane may lie beneath the non-shared connections in another viable configuration.

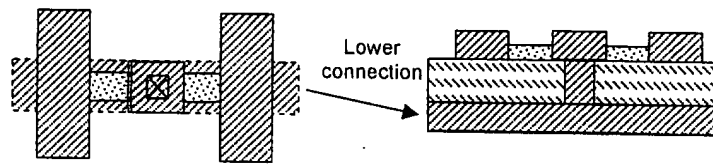


Fig 1a. Horizontal structure, top view.

Fig 1b. Horizontal structure, side view


2. *Vertical configuration with solution lining a trench feature.* A thin film of the solution is made to conformally line the inner surface of a trench feature by chemical or physical vapor deposition and then etched back to remove unwanted material on the bottom or from particular faces. Note also that directional deposition may be used to coat only the east-west (or north-south) faces of the trench. The film thickness is in the order of a few tens of nm down to a few nm. The film may be partially or fully etched-back (Figs. 2a and 2b respectively) using anisotropic etching. In this case the shared electrode is the lower level of metal and the top electrode is split to provide separate connections to the left and right PMC devices. In this example, the space between the devices in the trench is backfilled with a compliant dielectric which does not interfere with surface electrodeposition.

A cross-sectional diagram of a wall. It consists of a solid outer layer on the left, followed by a cavity, and then a solid inner layer on the right. The outer layer is filled with a material represented by diagonal hatching. The inner layer is filled with a material represented by a stippled pattern. The cavity between them is empty.

← North-south split
electrode layer

← East-west common electrode layer

3. *Vertical configuration with stacked cells.* In this case, vertical devices, in which the electrode placement is above and below the solid solution, utilize a common electrode which lies in a plane between mirror-image devices. An example with eight cells is shown in Fig. 3 below. In this case the common electrodes run east-west and both sets of opposite electrodes run north-south but in different planes.

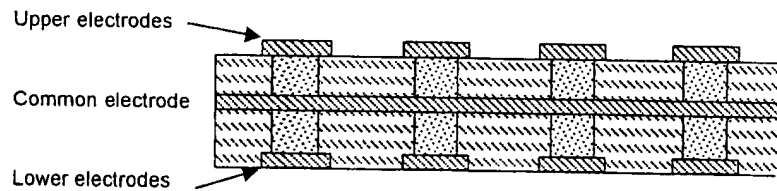

Common electrode

Lower electrodes

Fig. 3. Stacked electrode configuration with central shared electrode.


Note that a combination of 2 and 3 above is also possible and 1, 2 and 3 may be extended to more layers of devices to allow extremely high storage densities to be attained. In addition, the via plug in 1 may be fabricated as an in-via diode (p-n junction or Schottky) to provide some degree of cell-to-cell isolation.

Although the present invention is set forth herein in the context of the drawing figures, it should be appreciated that the invention is not limited to the specific form shown. Various modifications, variations, and enhancements in the design and

arrangement of the method and apparatus set forth herein, may be made without departing from the spirit and scope of the present invention.

60231427-090800

United States Patent & Trademark Office
Office of Initial Patent Examination -- Scanning Division

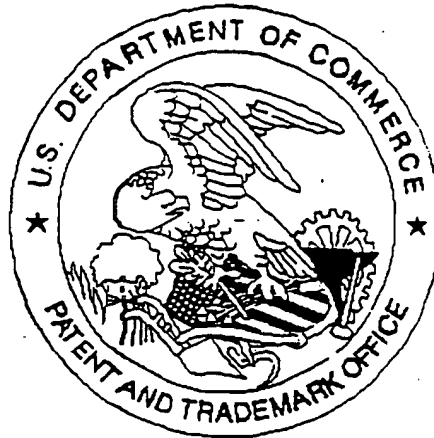

Application deficiencies were found during scanning:

☒ Page(s) _____ of Drawings were not present
for scanning. (Document title)

☐ Page(s) _____ of _____ were not present
for scanning. (Document title)

☒ Scanned copy is best available.

Small Entity